



DUAL VOLTAGE (28 V/14 V) applications:

1. Connect as shown.
2. Support harnesses within 5" of regulator.

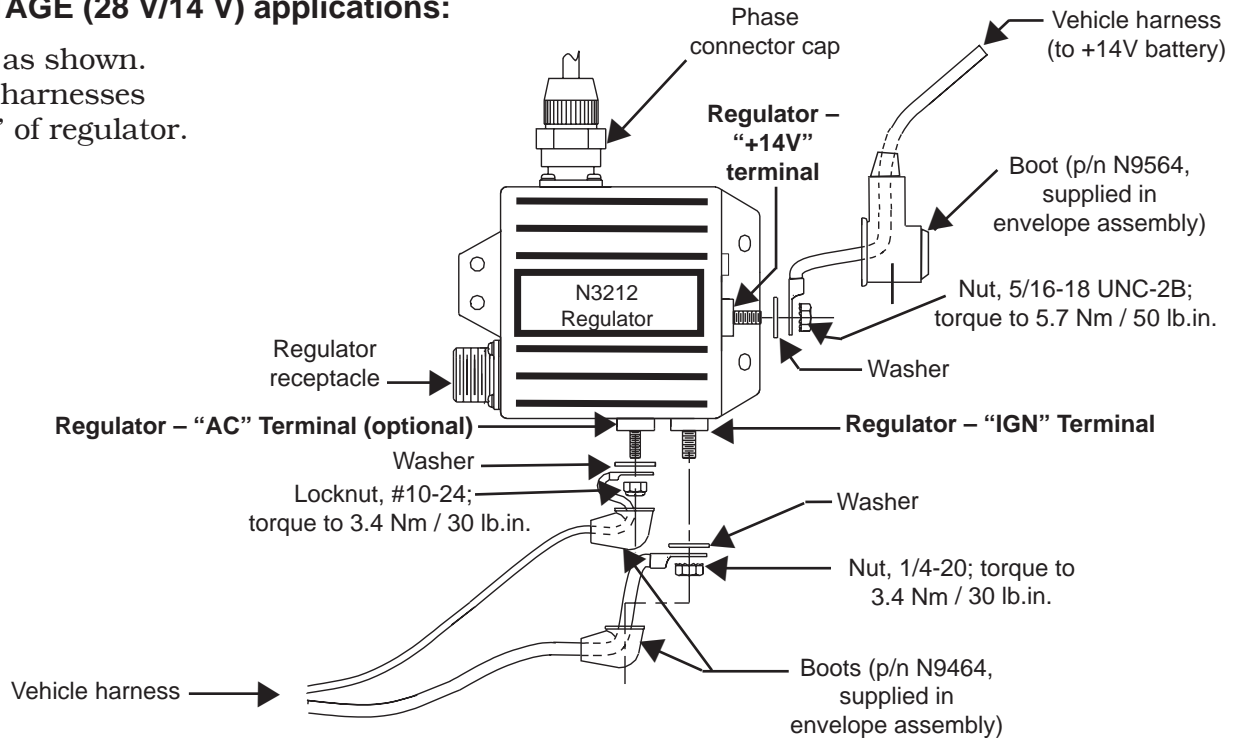


Figure 1 – N3212 Regulator **Dual Voltage** Wiring Connections

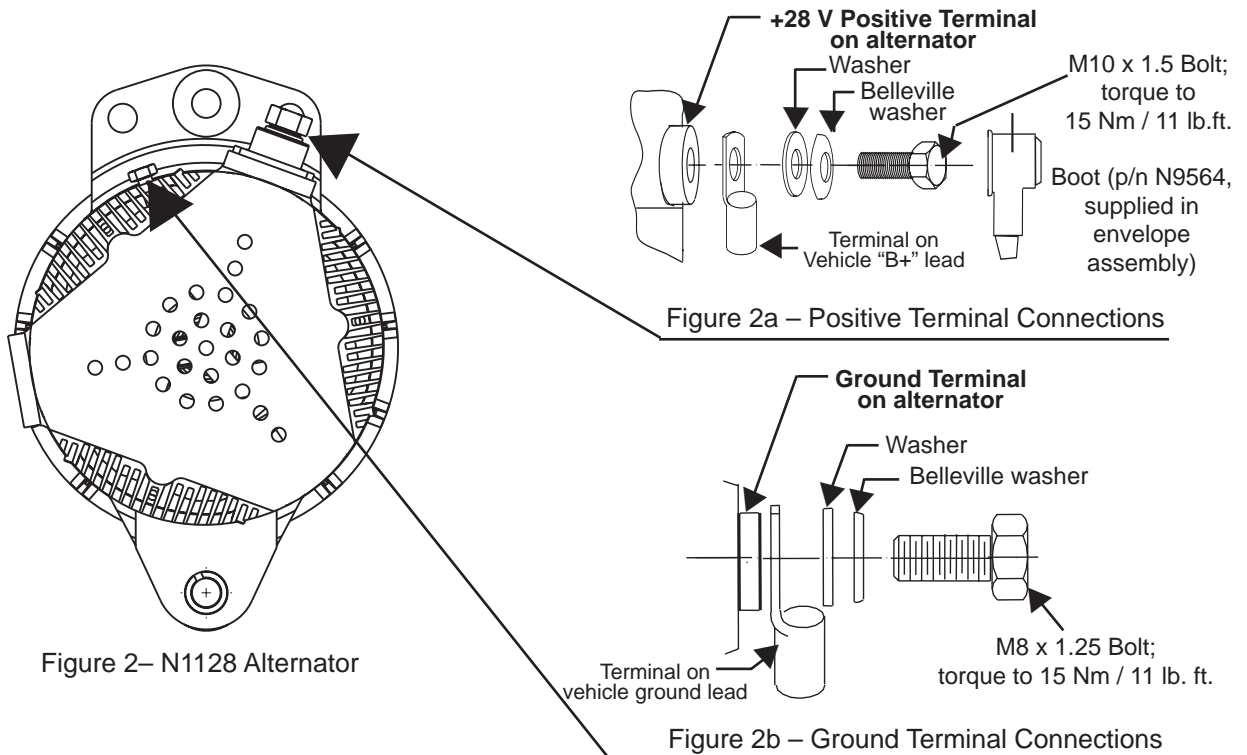


Figure 2– N1128 Alternator

Figure 2a – Positive Terminal Connections

Figure 2b – Ground Terminal Connections