

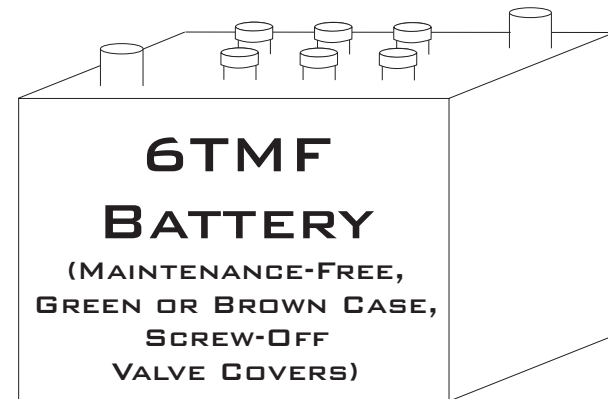


WARNING

To prevent unsafe operating conditions and severe damage to vehicle and equipment, follow directions below to adjust regulator setpoint.

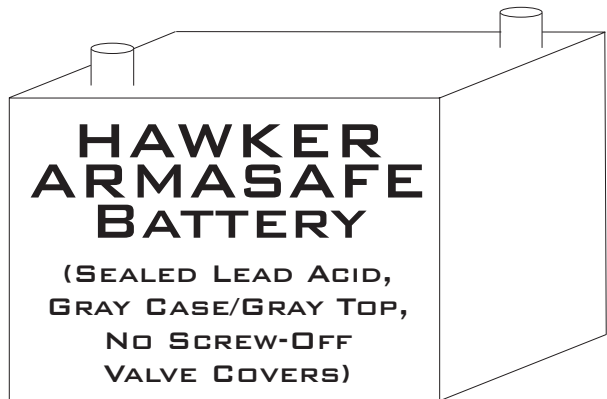

CEN N3215B Regulator Setpoint
MUST be set to Position #1
on underside of regulator
for HAWKER ARMASAFE,
Gel, or AGM batteries



CEN N3215B Regulator Setpoint
MUST be set to Position #2
on underside of regulator
for 6TMF, 6TLFP, or
6TLMF batteries

